


SERIE K


FREQUENZA =30KHz

CH1=MODULAZIONE


CH2=ANALOG FORWARD

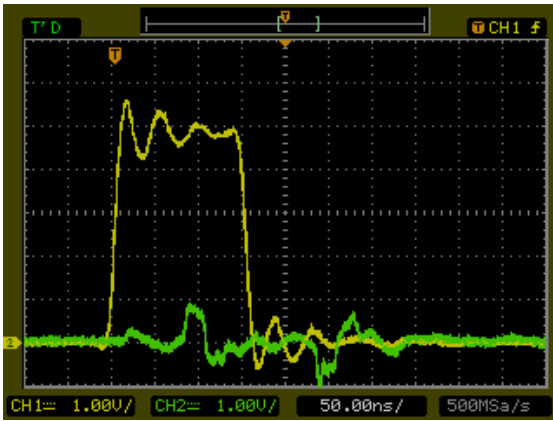


ENABLE OFF

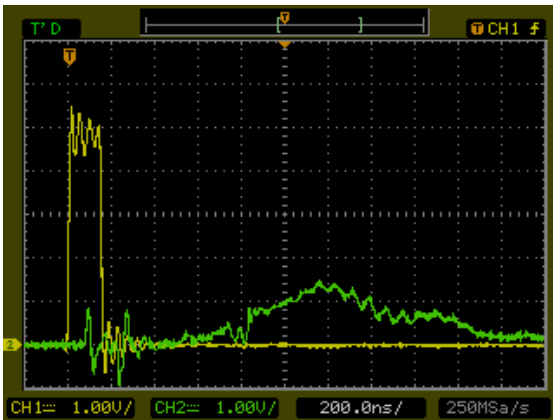

ENABLE ON

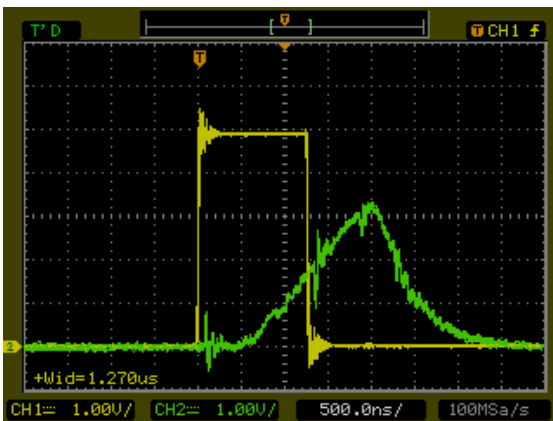

LASER ON – Ton 1,27uS (ampiezza max An. FWD)

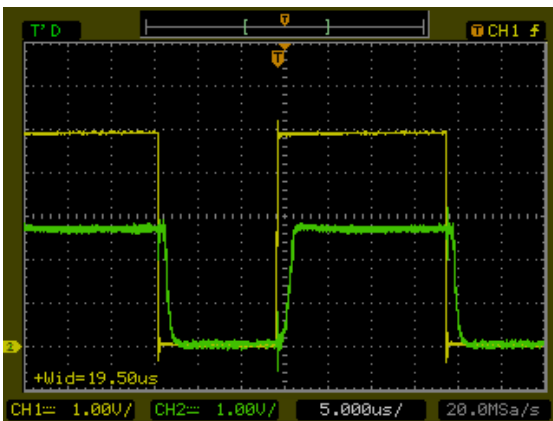


LASER ON – DUTY 60%


FREQUENZA =30KHz

CH1=MODULAZIONE


CH2=ANALOG REFLECTED

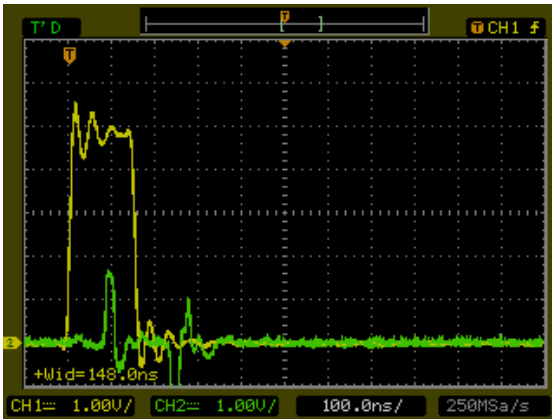


ENABLE OFF

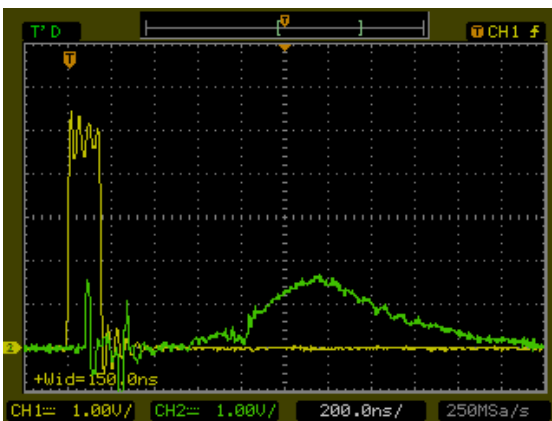

ENABLE ON

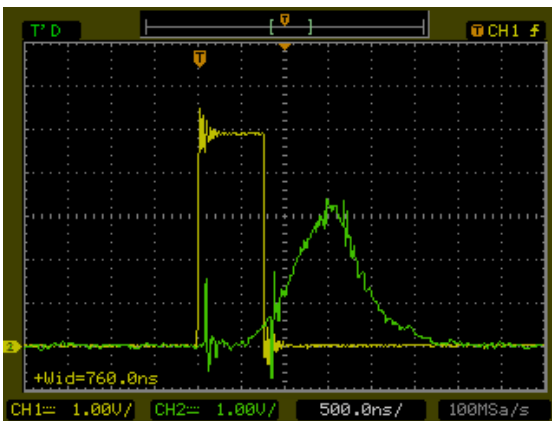

LASER ON – Ton 760ns (ampiezza max An. Ref)

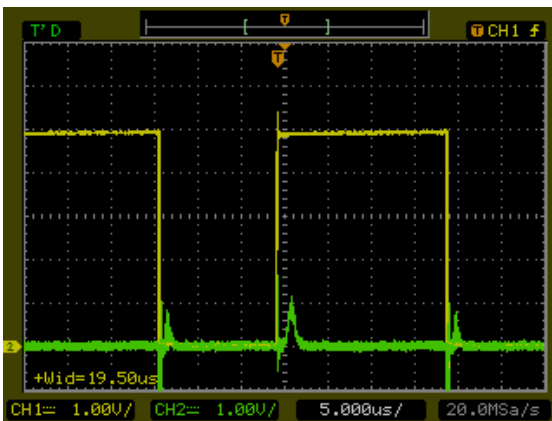


LASER ON – DUTY 60%


FREQUENZA =30KHz

CH1=MODULAZIONE


CH2=DIGITAL FORWARD

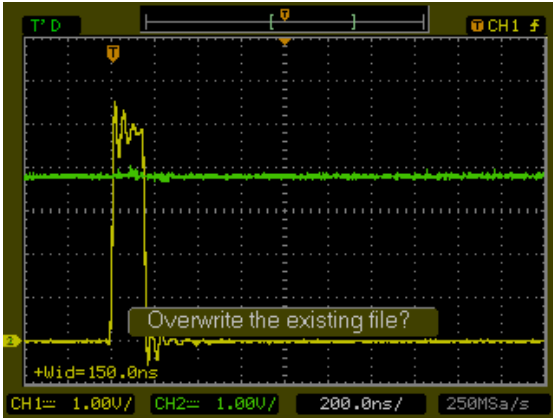


ENABLE OFF

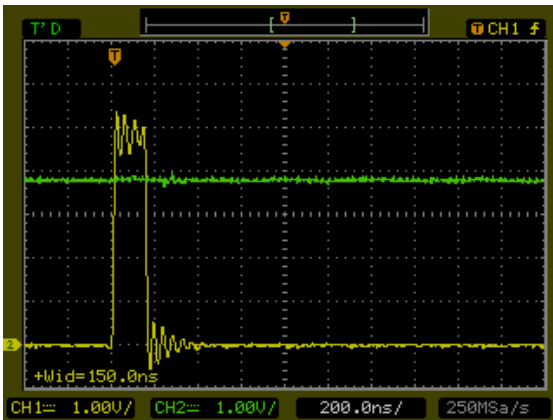

ENABLE ON

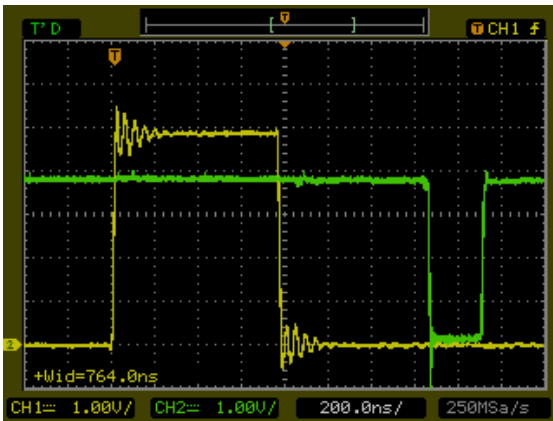

LASER ON – Ton 764ns (cambio stato dig. Fwd)

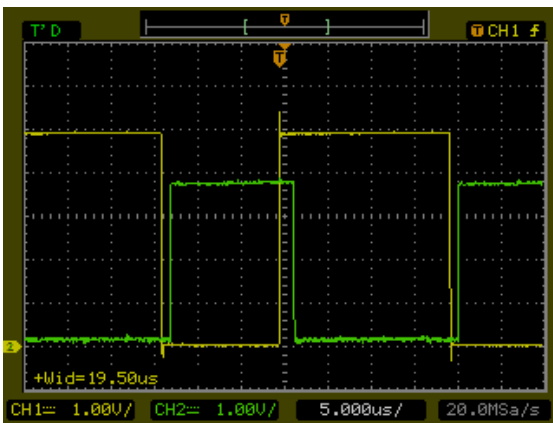


LASER ON – DUTY 60%


FREQUENZA =30KHz

CH1=MODULAZIONE


CH2=DIGITAL REFLECTED

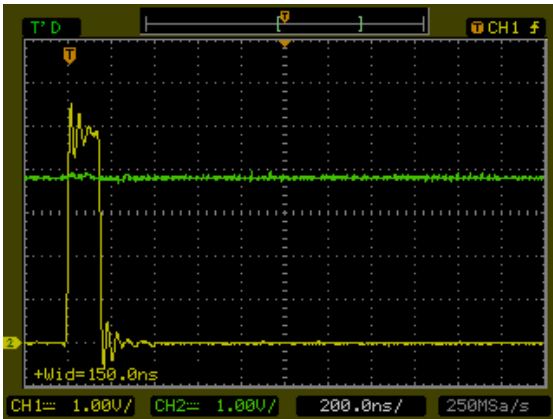


ENABLE OFF

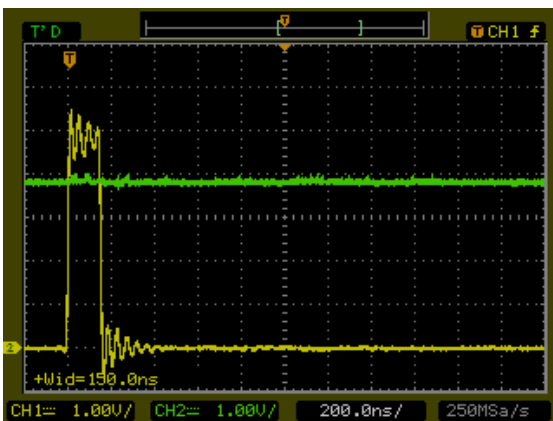


ENABLE ON

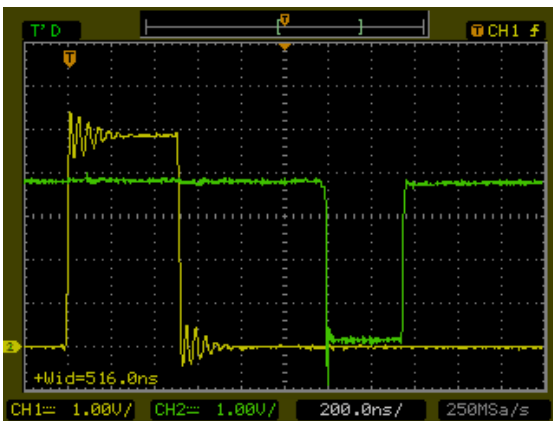

LASER ON – Ton 516nS (cambio stato dig. Ref)

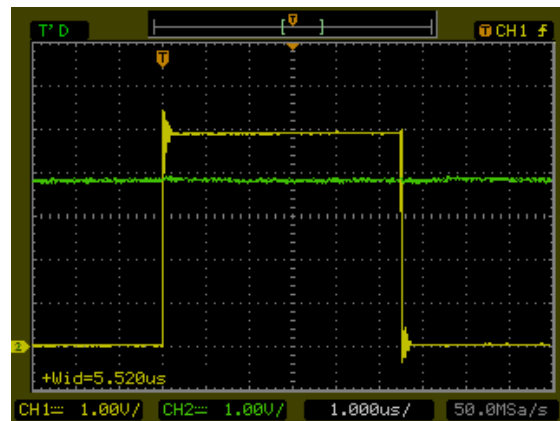

LASER ON – Ton 5,5uS (cambio stato dig. Ref)

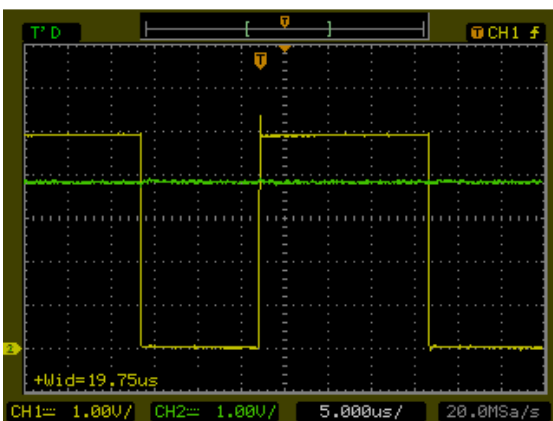


LASER ON – DUTY 60%


FREQUENZA =30KHz

CH1=MODULAZIONE


CH2=DUTY LIMIT

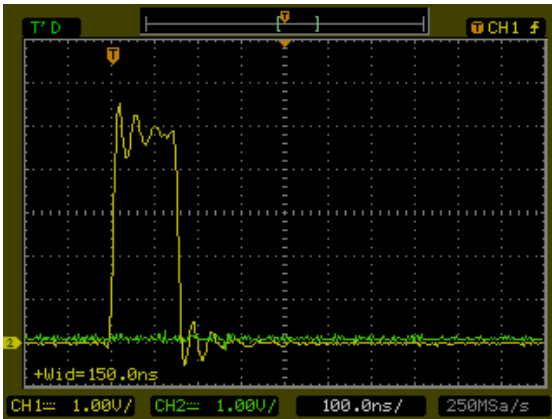

ENABLE OFF

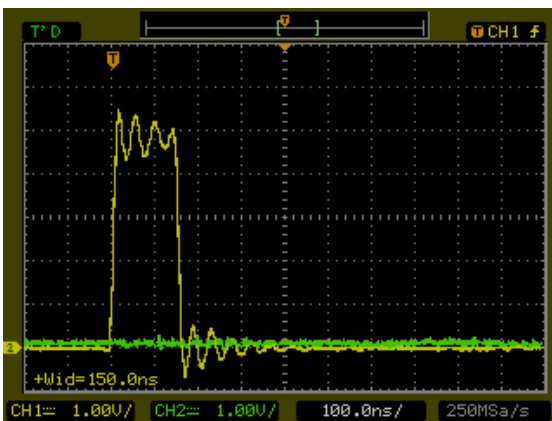

ENABLE ON

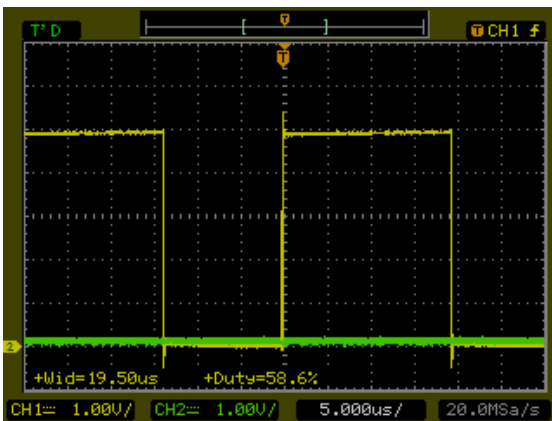


LASER ON – DUTY 60%


FREQUENZA =30KHz

CH1=MODULAZIONE


CH2=VSWR

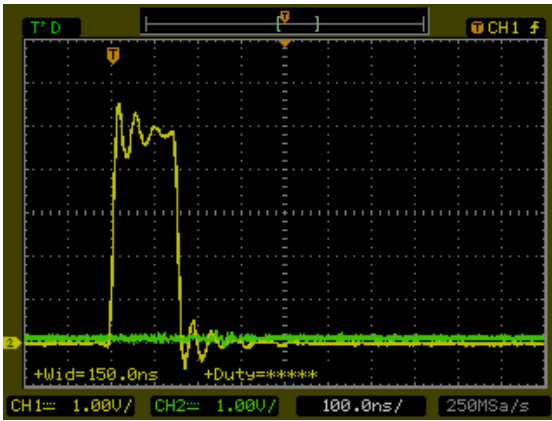

ENABLE OFF

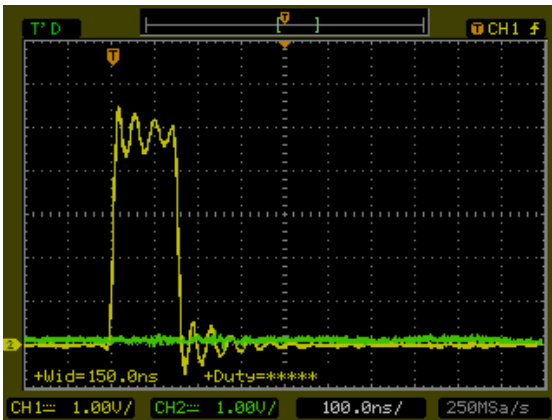

ENABLE ON

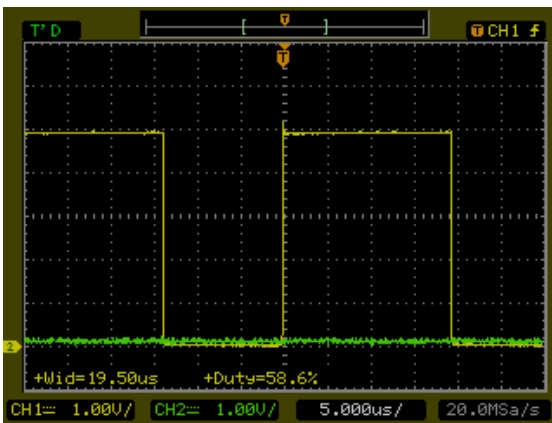

LASER ON – DUTY 60%