



MODIFICA INTRODotta PER INGRESSO ESTERNO 5V:
 - RIMOSSO R3, R7, R11, R14
 - CC STAGNO R2, R6, R10, R16

LOW PASS FILTER			
	BPH OPEN BPL OPEN	BPH CLOSED BPL OPEN	BPH OPEN BPL CLOSED
INPUT MAX FREQUENCY	100KHz	10KHz	1KHz

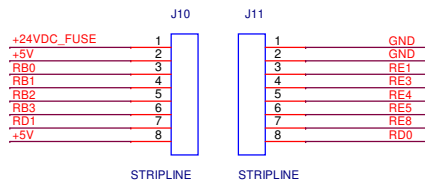

DS4
 Via Giardini 32
 24066 Pedrengo
 BERGAMO
 Italy

Title: STROBE GEN EXTENDED

Document Number: **I/O 5V/24V**

Date: Wednesday, March 10, 2021

Sheet 1 of 1

Rev 1.0C